


A2017 板

株式会社UACJ 製品

規格 JIS H4000 比重 2.80

(● 110 ~ 150t は JIS 非該当)

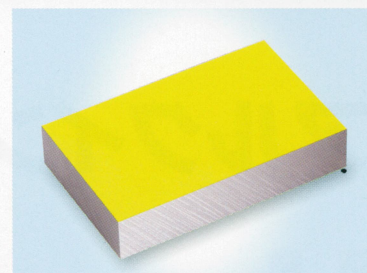

板厚(ミリ)	幅(ミリ)	長(ミリ)	板厚公差	調質	製造方法	参考重量 1枚重量(kg)	保護ビニール	切断 販売	切断 方法	標準 切断公差					
3	1250	2500	± 0.13	T3	圧延	26.3	両面黄色	可	丸鋸	+ 2.0, - 0					
4											35.0				
5											43.8				
6					± 0.18	T351									
8					± 0.22						52.5				
10					± 0.28						70.0				
12					± 0.38						87.5				
15					± 0.55						105.0				
18											131.3				
20					± 0.6						157.5				
25											175.0				
30					± 0.65						218.8				
35					± 0.70						262.5				
40											306.3				
45					± 0.75						350.0				
50					± 0.80	393.8									
55						437.5									
60					± 0.90	481.3	片面黄色								
65					± 1.1	525.0									
70				568.8											
75			± 1.40	612.5											
80			± 1.70	656.3											
85				700.0											
90				743.8											
95				787.5											
100				831.3											
● 110			± 1.90		875.0	無し									
● 120					962.5										
● 130					1050.0										
● 150			± 2.0		1137.5										
					1312.5										

標準切板切断範囲		
板厚	幅	長さ
3 ~ 30	15 ~ 1250	15 ~ 2500
35 ~ 150	1/2T ~ 1250	1/2T ~ 2500

オプション メニュー	M カットプラス	P30
	円板・リング	P31
	WJ 異形切断	P32
	4F・6F	P33
	MC 加工	P34